


- Key Notes
- 1

EXISTING UNDERGROUND SERVICE FEEDER SHALL BE DE-ENERGIZED, DISCONNECTED AND REMOVED.
- 2


EXTERIOR LIGHTING STANDARD & CONCRETE BASE SHALL BE DE-ENERGIZED, DISCONNECTED AND REMOVED AFTER NEW EXTERIOR LIGHTING IS OPERATIONAL. PROVIDE TEMPORARY SITE LIGHTING AS PER SPECIFICATIONS. MAINTAIN CONTINUITY OF EXISTING CIRCUIT SERVING EXISTING EXTERIOR LIGHTING POLES TO REMAIN.
- 3

EXISTING LIQUID OXYGEN TANKS TO REMAIN. LOCATION OF THE EXISTING UNDERGROUND ELECTRICAL FEEDERS SERVING THE OXYGEN TANKS. MAINTAIN CONTINUITY OF EXISTING CIRCUITS SERVING TANKS AT ALL TIME. AT NO TIME SHALL ELECTRICAL SERVICE BE DISTURBED.
- 4

EXISTING GUARD SHACK TO BE DE-ENERGIZE, DISCONNECTED AND REMOVED AFTER NEW EXTERIOR LIGHTING IS OPERATIONAL. MAINTAIN ELECTRICAL AND TELECOMMUNICATION SERVICE TO SHACK AS NEEDED.

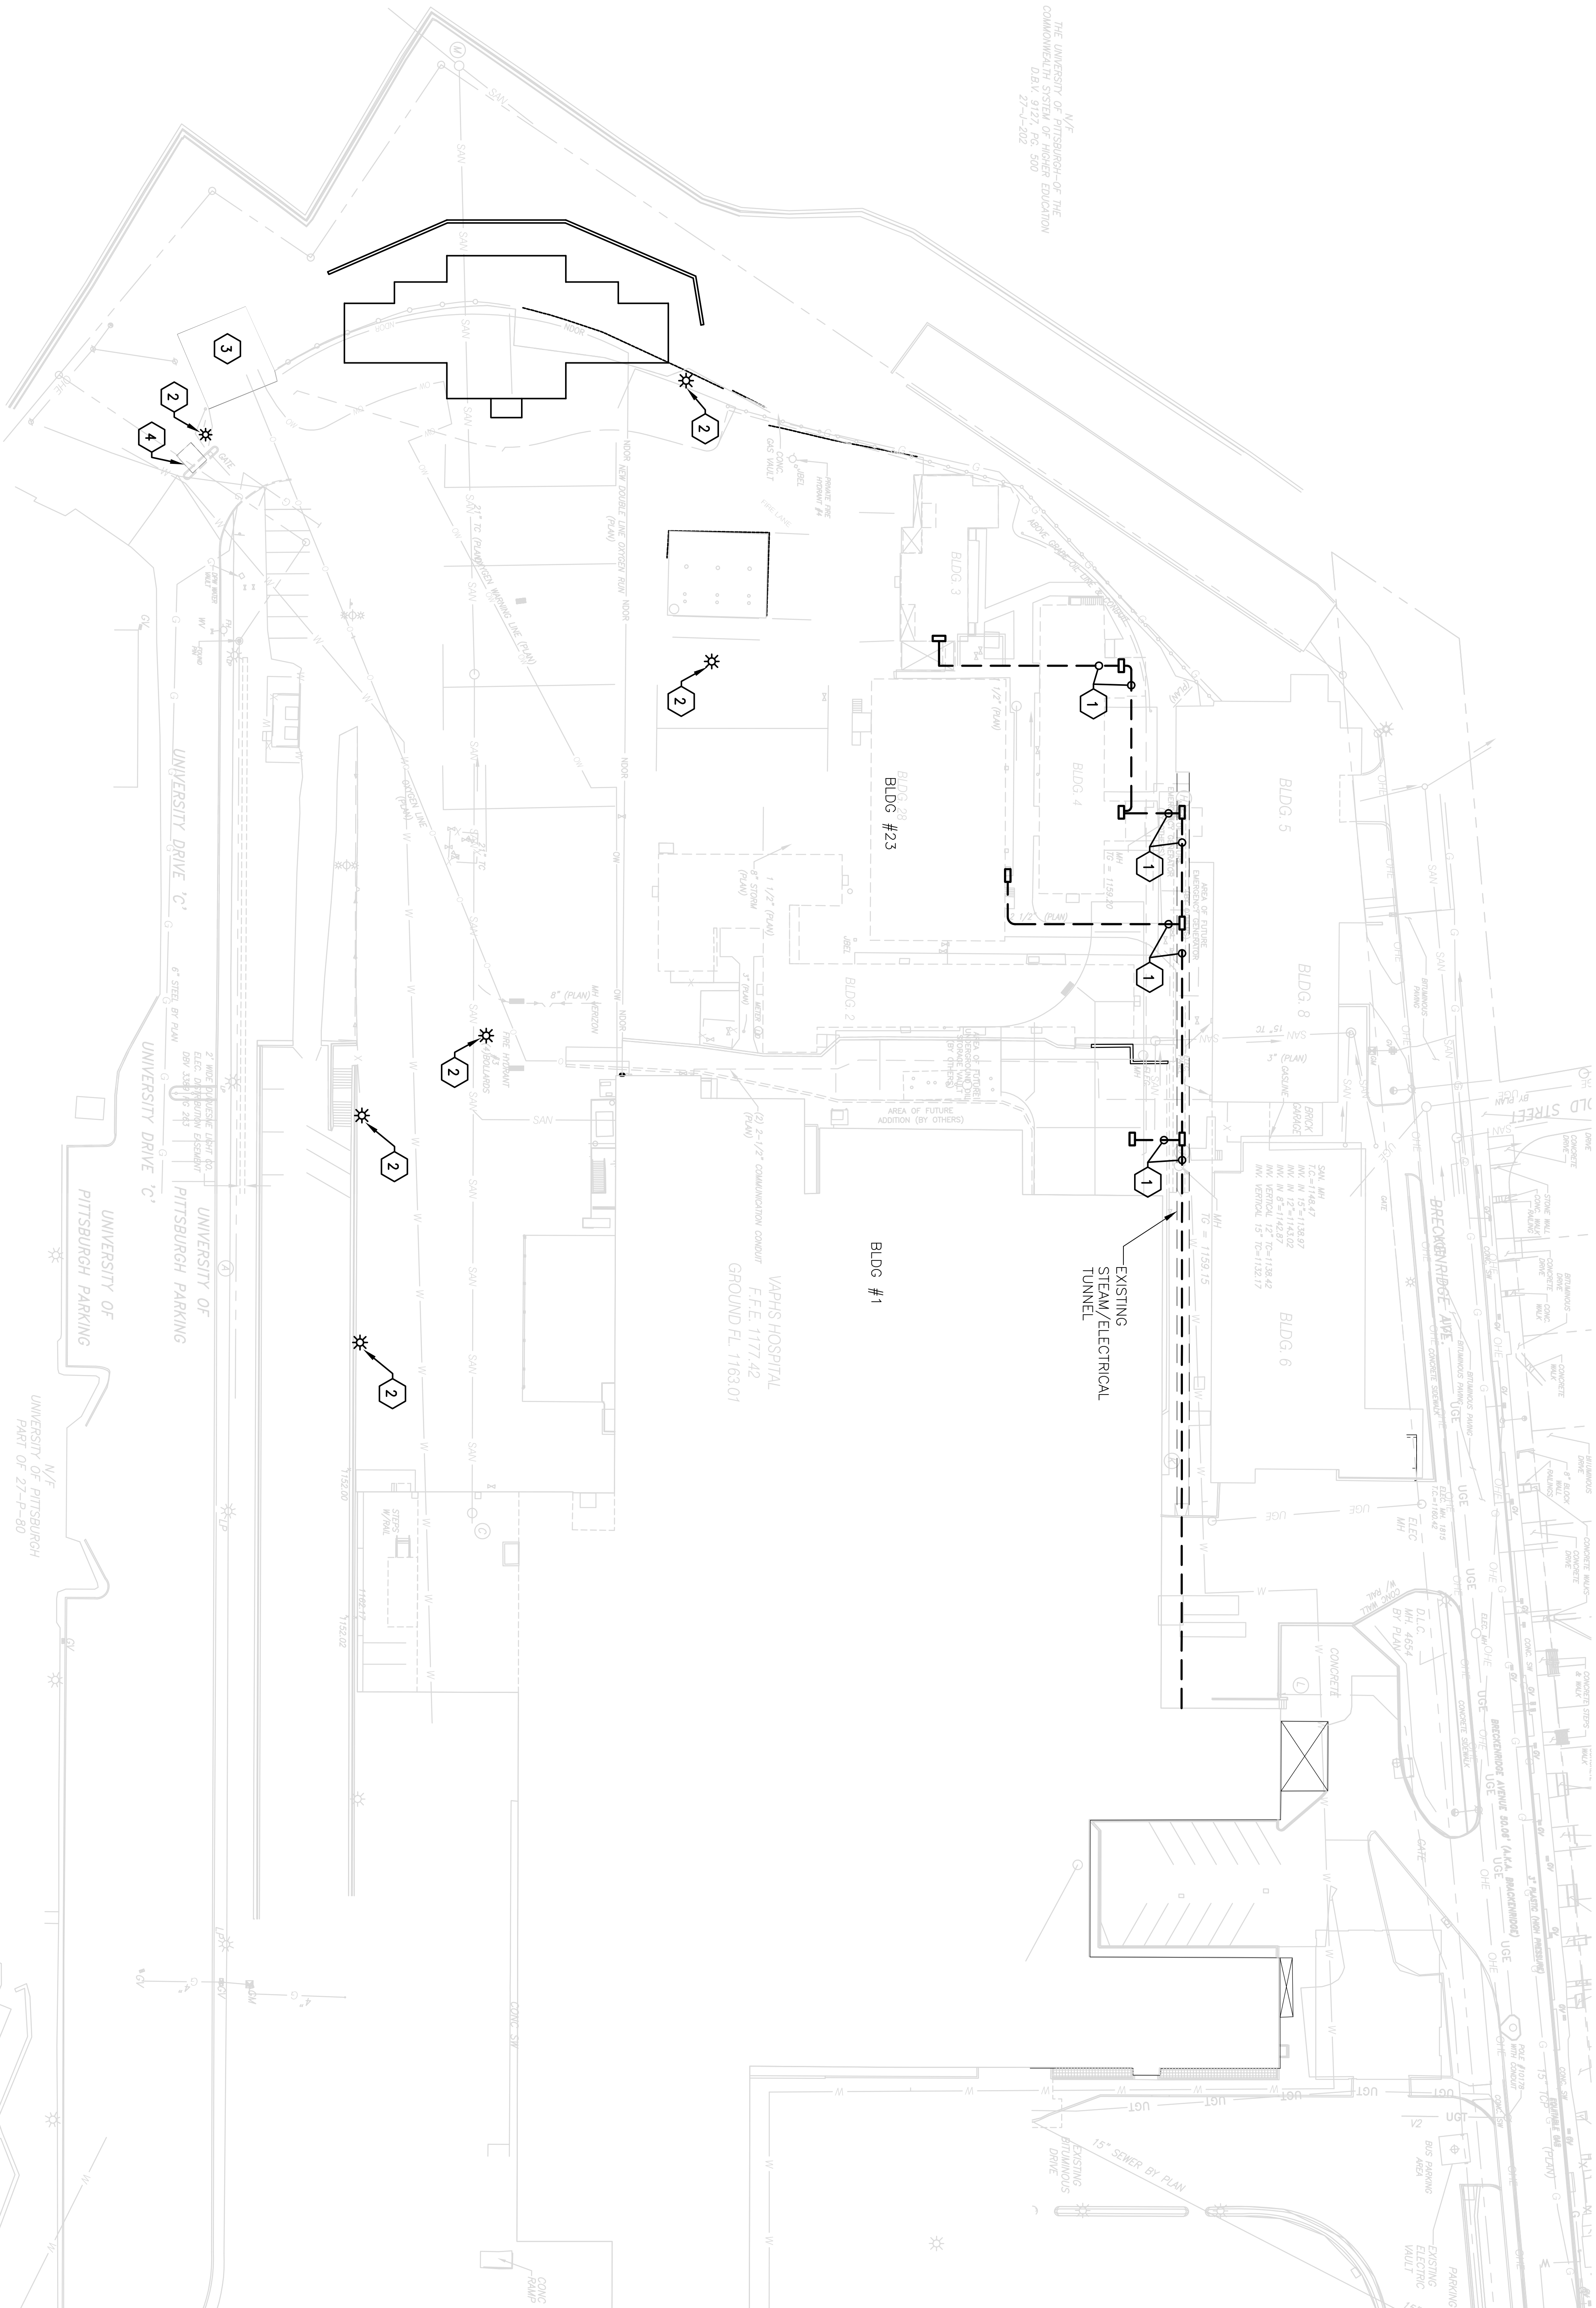

1 Electrical Demolition - Site Plan

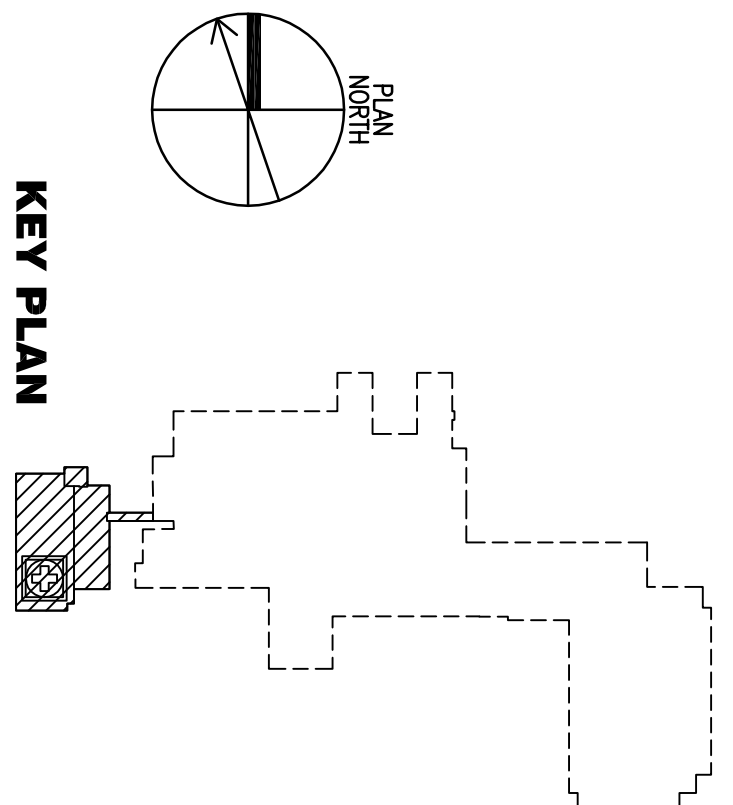

FOR CONSTRUCTION
FULLY SPRINKLERED

| | | | |
|--|--|---|--|
| CONSULTANTS: | | ARCHITECT/ENGINEERS: | |
| | | | |
| HDR Architecture, Inc. 1101 King Street, Suite 400 Alexandria, Virginia 22314-2841 703.218.8800 | | 227 First Pitt Boulevard Pittsburgh, Pennsylvania 15222 TEL: 412-353-1200 FAX: 412-353-1111 www.astorino.com | |
| Revisions: | | Project Title | |
| | | VA CARES CONSOLIDATION | |
| | | VAMC, PITTSBURGH, PA | |
| | | RESEARCH OFFICE BLDG. | |
| | | Location | |
| | | VAPHS UNIVERSITY DRIVE | |
| | | Date | |
| | | 08-18-10 | |
| | | Checked | |
| | | TMR | |
| | | Drawn | |
| | | LLG | |
| | | Dwg. # | |
| | | ED0-201 | |
| | | Office of Facilities Management | |
| | | | |