

GENERAL NOTES:


- A. THESE DRAWINGS HAVE BEEN DEVELOPED FROM AVAILABLE ORIGINAL DRAWINGS FURNISHED BY THE OWNER AND FIELD SURVEYS. MATERIALS, DIMENSIONS, WALL THICKNESS, ROUGH OPENINGS, PATTERNS AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS, AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
- B. ALL ITEMS OR ASSEMBLIES INDICATED BY A SCREENED LINE TYPE OR NOTED "EXISTING TO REMAIN" ARE ITEMS THAT ARE CURRENTLY EXISTING AND SHOULD NOT BE DEMOLISHED.
- C. ITEMS OR ASSEMBLIES INDICATED BY A HEAVY DASHED LINE TYPE ARE ELEMENTS THAT ARE TO BE REMOVED. REFER TO EACH ELEMENTS DESCRIPTION OR DOCUMENTATION FOR MORE INFORMATION. PROTECT ALL ITEMS THAT WILL BE SALVAGED, AND COORDINATE DELIVERY WITH OWNER.
- D. REFER TO STRUCTURAL, MECHANICAL, PLUMBING, ELECTRICAL, AND COMMUNICATIONS DRAWINGS FOR ADDITIONAL DEMOLITION OR BUILDING SYSTEMS.
- E. PROTECT ALL WORK INDICATED TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, FINISHES, COMPONENTS, AND THE LIKE THAT ARE DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE.
- F. AT LOCATIONS WHERE A WALL TO BE REMOVED INTERSECTS A WALL TO REMAIN, A FLUSH CLEAN SURFACE SHALL REMAIN ONCE WALL IS REMOVED.
- G. UPON COMPLETION OF DEMOLITION, THOROUGHLY CLEAN THE UNDERSIDE OF FLOOR STRUCTURES, INSIDE OF ACCESSIBLE CEILING AND WALL CAVITIES, INSIDE FIRE PLACE AND CHIMNEYS, AND ALL REMAINING CEILING, WALL AND FLOOR SURFACES OF DUST, DIRT, AND DEBRIS.
- H. REMOVE ALL CARPET, TACK STRIPS, AND ADHESIVES THROUGHOUT.
- I. HAZARDOUS MATERIALS WILL BE PROFESSIONALLY REMOVED PRIOR TO COMMENCEMENT OF DEMO. REFER TO "HAZARDOUS MATERIALS INSPECTION OF BUILDING 33: BOISE VETERANS ADMINISTRATION MEDICAL CENTER DATED AUGUST 20-23, 2010.
- J. MOVE ALL EXISTING SCREWS, TACKS, NAILS, AND BRACKETS FROM WALL INDICATED TO REMAIN.
- K. REMOVE AND DISCARD NON-ORIGINAL OAK PANELING AND TRIM.
- L. ANY PLASTER FOUND ON VERTICAL SURFACES AND SOFFITS, SHALL REMAIN U.O.N. IT IS ACCEPTABLE TO REMOVE SECTIONS OF FAILING OR LOOSE PLASTER IF FOUND DURING DEMOLITION. THE EXISTING PLASTER AND BRICK REMAINING ON THE WALLS AND SOFFITS SHALL BE CONSIDERED SUBSTRATE AND CAN REMAIN IF IT IS FOUND THAT THE REMAINING PLASTER OR BRICK IS NOTE STABLE, THE ARCHITECT SHALL BE NOTIFIED.
- M. PRIOR TO COMMENCING WITH DEMOLITION ACTIVITIES EAST OF GRID LINE "D", INSTALL TEMPORARY PROTECTION FROM DUST AND WEATHER AT ALL OPENINGS IN THE WALL ALONG GRID LINE "D". SOME OPENINGS ARE INDICATED ON THE DRAWINGS, OTHERS WILL BE UNCOVERED DURING DEMOLITION. ONCE THE BUILDING STRUCTURE IS REMOVED EAST OF GRID LINE "D", TEMPORARY WEATHER TIGHT PROTECTION SHALL BE CONSTRUCTED AT ALL OPENINGS TO PROTECT MECHANICAL SYSTEM PREVIOUSLY INSTALLED IN PHASE 1.
- N. CONTRACTOR IS TO REMOVE ALL WALL MOUNTED SIGNAGE, BULLETIN BOARDS, CHART HOLDERS, ETC. PRIOR TO PAINTING UNLESS DIRECTED OTHERWISE. TURN ALL REMOVED ITEMS OVER TO THE VA. THE VA WILL BE RESPONSIBLE FOR REINSTALLATION OF ITEMS.
- P. TEMPORARY WALLS THAT SEPARATE AREAS UNDER CONSTRUCTION FROM OTHER AREAS MUST BE METAL STUDS AT 24" ON CENTER WITH 5/8" FIRE TAPED TYPE X SHEETROCK ON ONE SIDE WITH ACCESS DOORS. TEMPORARY PARTITIONS MUST RUN FROM SLAB TO SLAB AND FROM EXTERIOR WALL OR FIRE RATED PARTITION TO EXTERIOR WALL OR FIRE RATED PARTITION. FIREBRICKS OR FIRE PLUGS MUST BE USED TO SEAL PENETRATIONS IN TEMPORARY OR PERMANENT FIRE SEPARATIONS UNTIL THEY CAN BE PROPERLY FIRE SEALED (I.E. CORE DRILLS FOR NEW SEWER LINES PRIOR TO INSTALLATION AND FIRE CAULKING OF SEWER LINES). INSTALL BARRIER PRIOR TO COMMENCING DEMOLITION AND CONSTRUCTION OF EACH AFFECTED PHASE. REMOVE BARRIER WHEN DIRECTED BY RESIDENT ENGINEER.

SHEET NOTES:


1. REMOVE EXISTING WALL AND ROOF DOWN T FIRST FLOOR.
2. REMOVE (E) COLUMN.
3. REMOVE (E) WINDOW SASHES, HARDWARE, AND INTERIOR TRIM. PROTECT AND MAINTAIN EXISTING EXTERIOR WOOD FRAME AND SILL. RE: A3.2 AND A3.3 FOR EXTERIOR RESTORATION AT WINDOW OPENING.
4. REMOVE (E) SECTION OF WALL FROM FIRST FLOOR FINISH FLOOR TO DORMER ROOF. PROTECT AND MAINTAIN EXITING STRUCTURE AT FLOOR LINES. COORDINATE WITH STRUCTURAL FOR STRUCTURAL MODIFICATIONS AND ADDED SUPPORT. REMOVE AND SALVAGE EXISTING BRICK FOR REUSE.
5. NO NOTE PROVIDED.
6. NO NOTE PROVIDED.
7. NO NOTE PROVIDED.
8. NO NOTE PROVIDED.
9. NO NOTE PROVIDED.
10. REMOVE (E) DOOR, HARDWARE, AND FRAME.
11. NO NOTE PROVIDED.
12. REMOVE (E) FLOOR STRUCTURE. CW/ STRUCTURAL.

LEGEND:

- (E) CONSTRUCTION TO BE REMOVED
- (E) CONSTRUCTION TO REMAIN

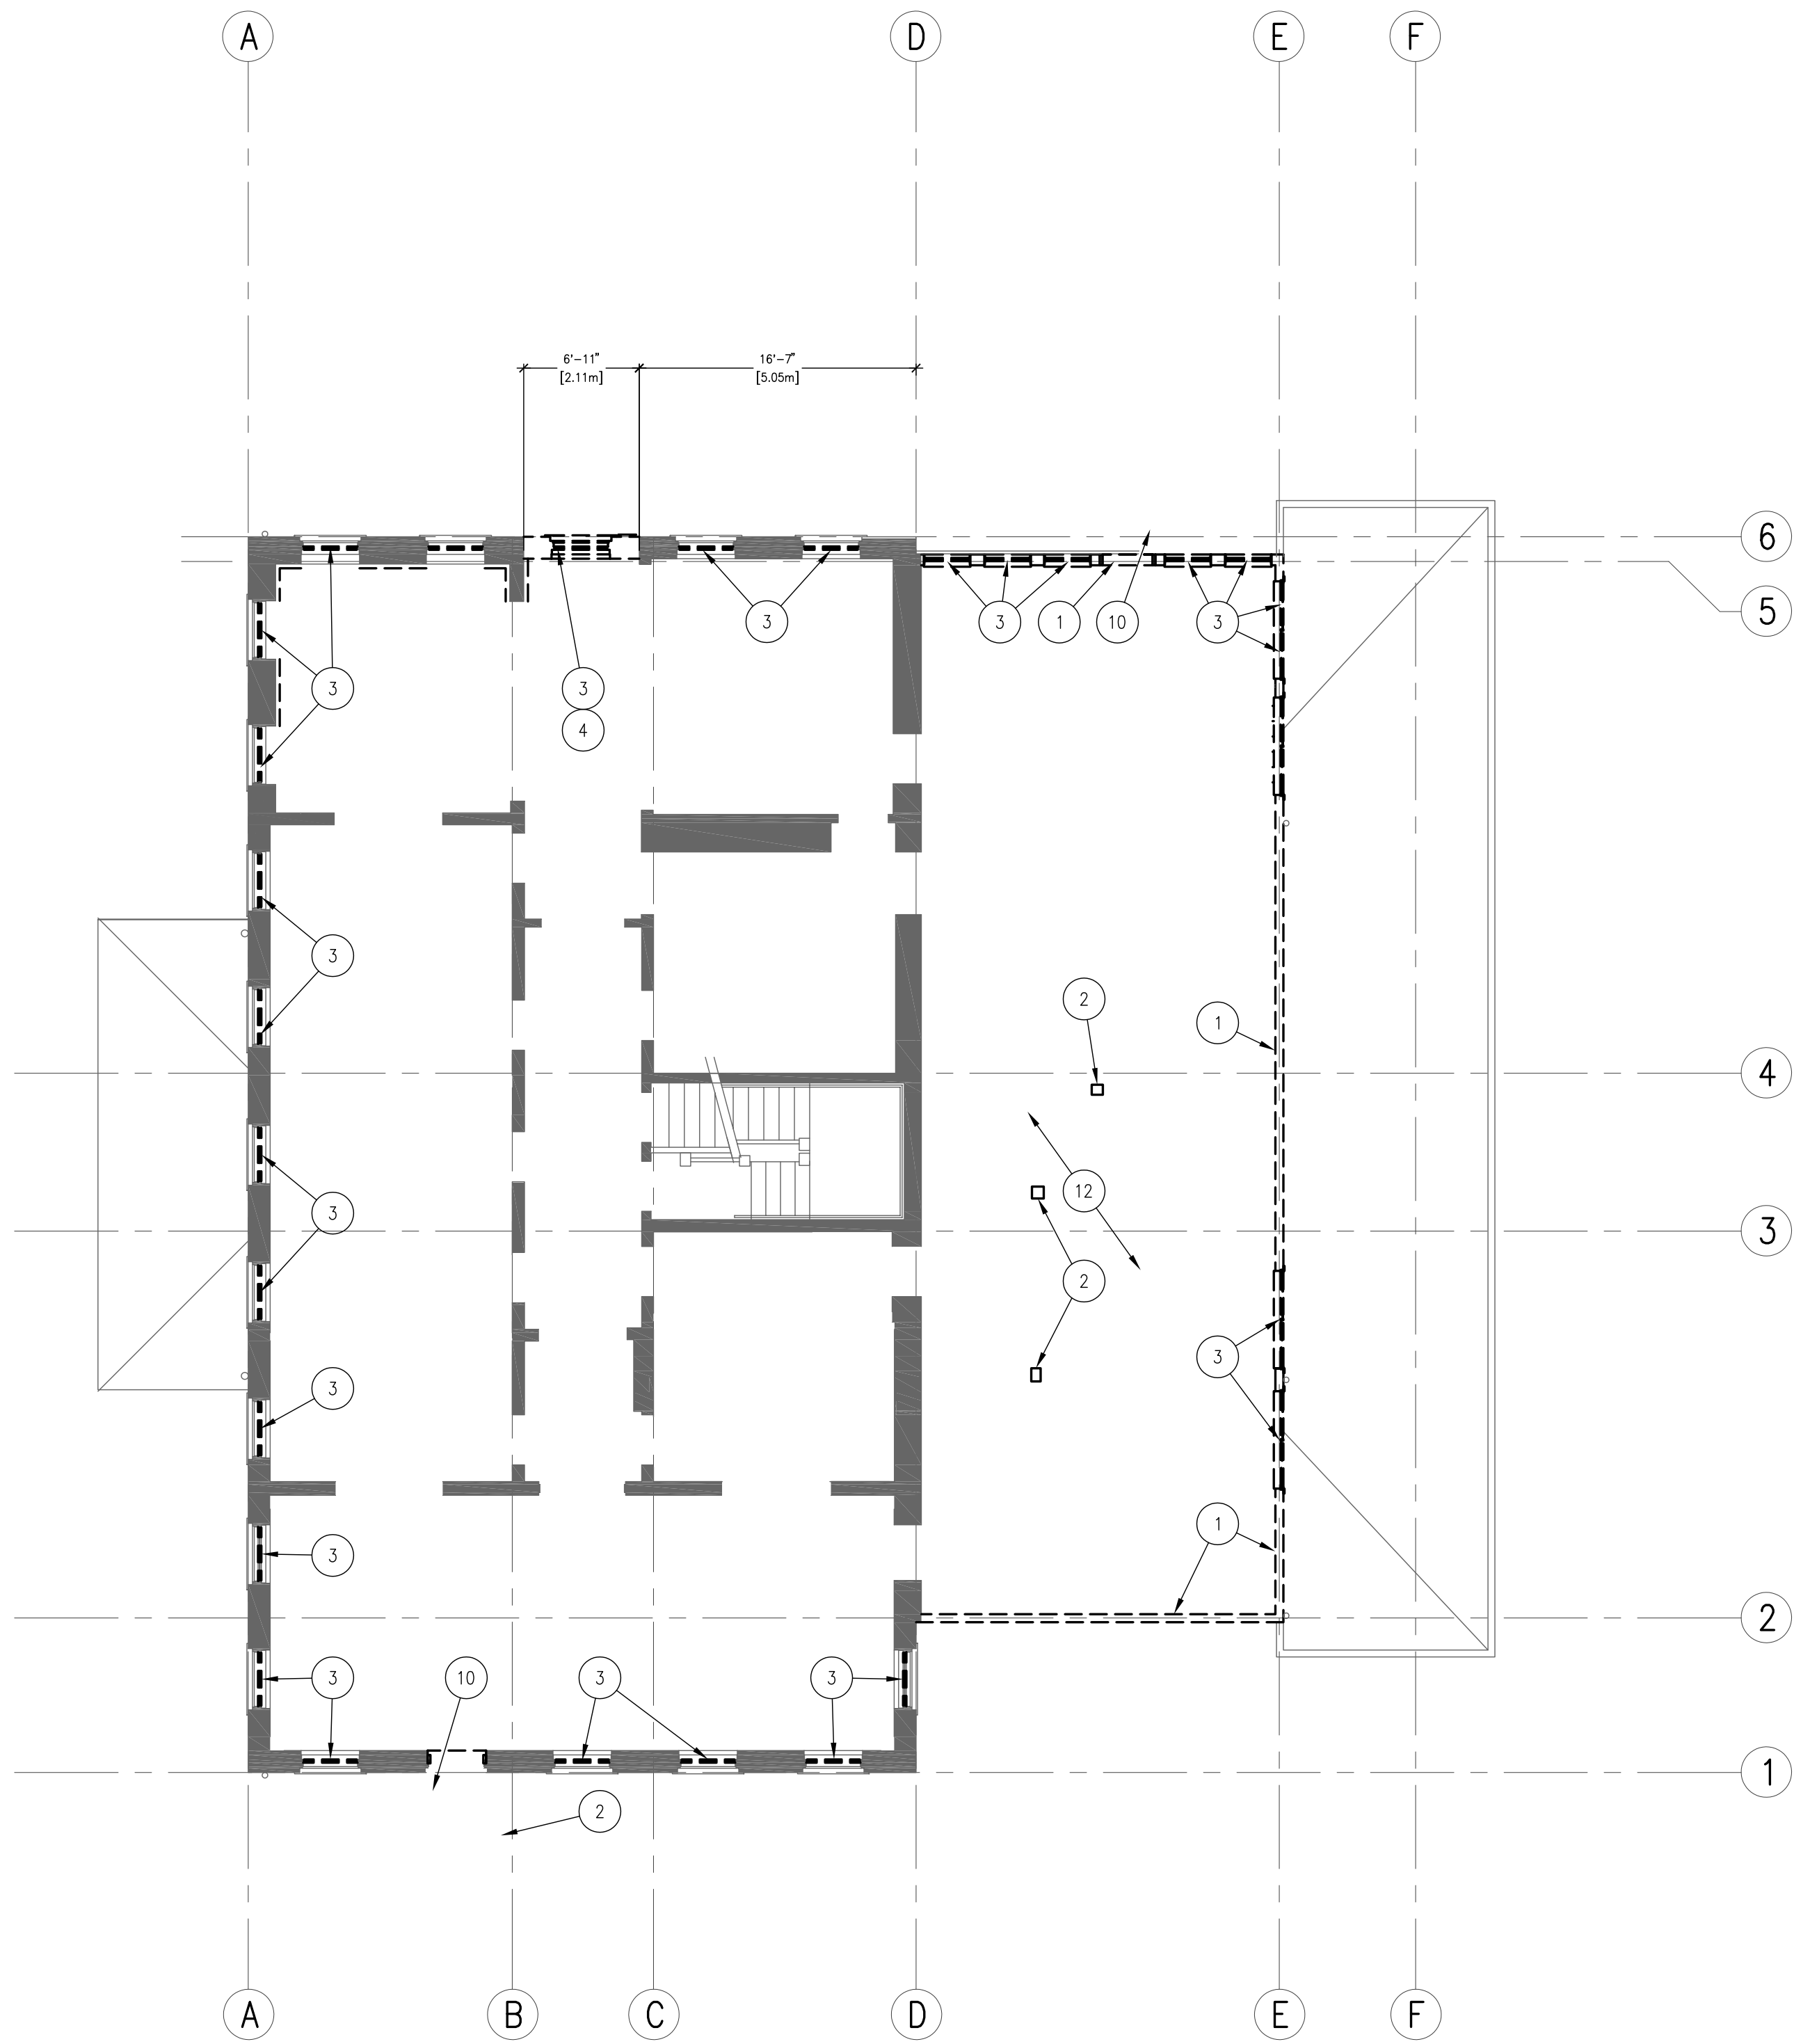

1 SECOND FLOOR DEMOLITION PLAN BLDG. 33

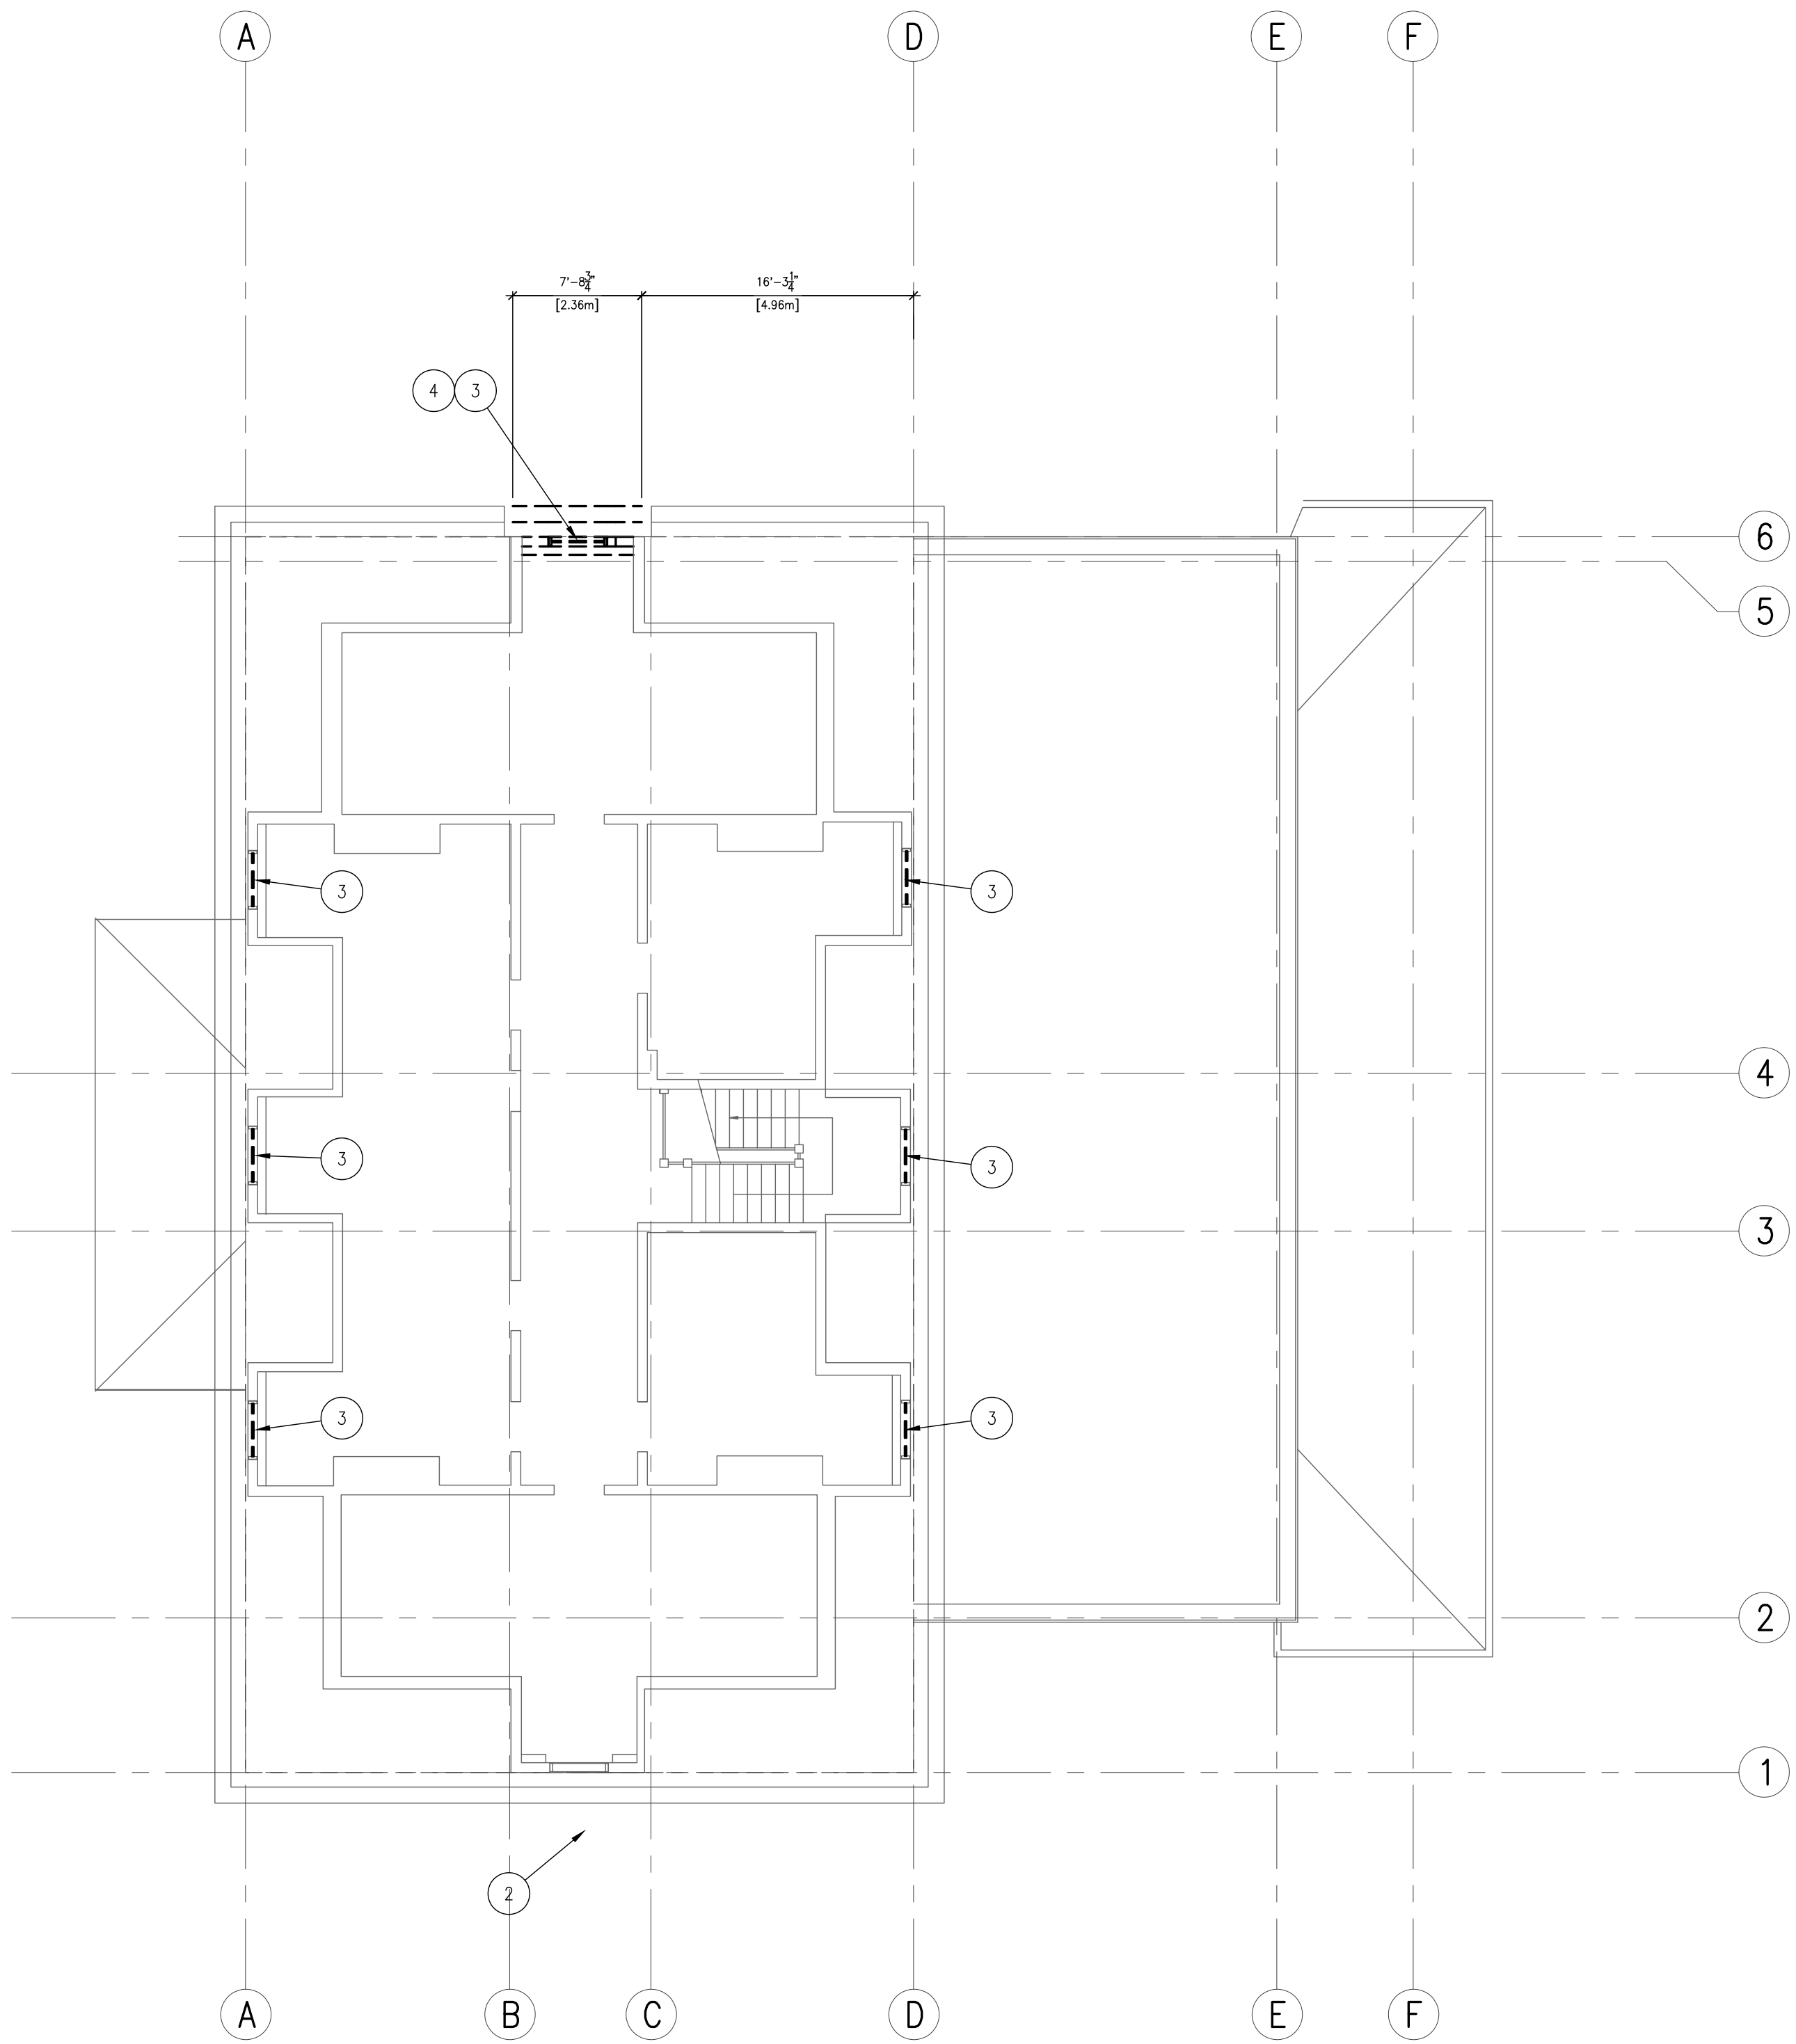

2 THIRD FLOOR DEMOLITION PLAN BLDG. 33

95% SUBMISSION

REVISIONS

DATE

CSHQ

C.W. MOORE PLAZA
250 S. 5TH ST. • BOISE, ID 83702
(208) 343-4635 • FAX (208) 343-1858
http://www.cshqa.com

JOHN D. MAULIN, ARCHITECT
C.W. MOORE PLAZA
250 S. 5TH ST.
BOISE, IDAHO
PHONE: 208-343-4635 FAX: 208-343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT / ENGINEER. WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT, THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY, ON OTHER PROJECTS, FOR ADDITIONS TO THE PROJECT, OR COMPLETION OF THE PROJECT, WHEN PHASED, WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY
NOT FOR
CONSTRUCTION

DRAWING TITLE

DEMOLITION PLANS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC
RENOVATE
BUILDING 33

BUILDING NUMBER

33

LOCATION

BOISE, IDAHO

CHECKED

JMO

DRAWN

BKS

DATE

03/04/11

PROJECT NO.

531-10-114

DRAWING NO.

A0.2

DWG. 11 OF 102

DEPARTMENT OF VETERANS AFFAIRS