






W206

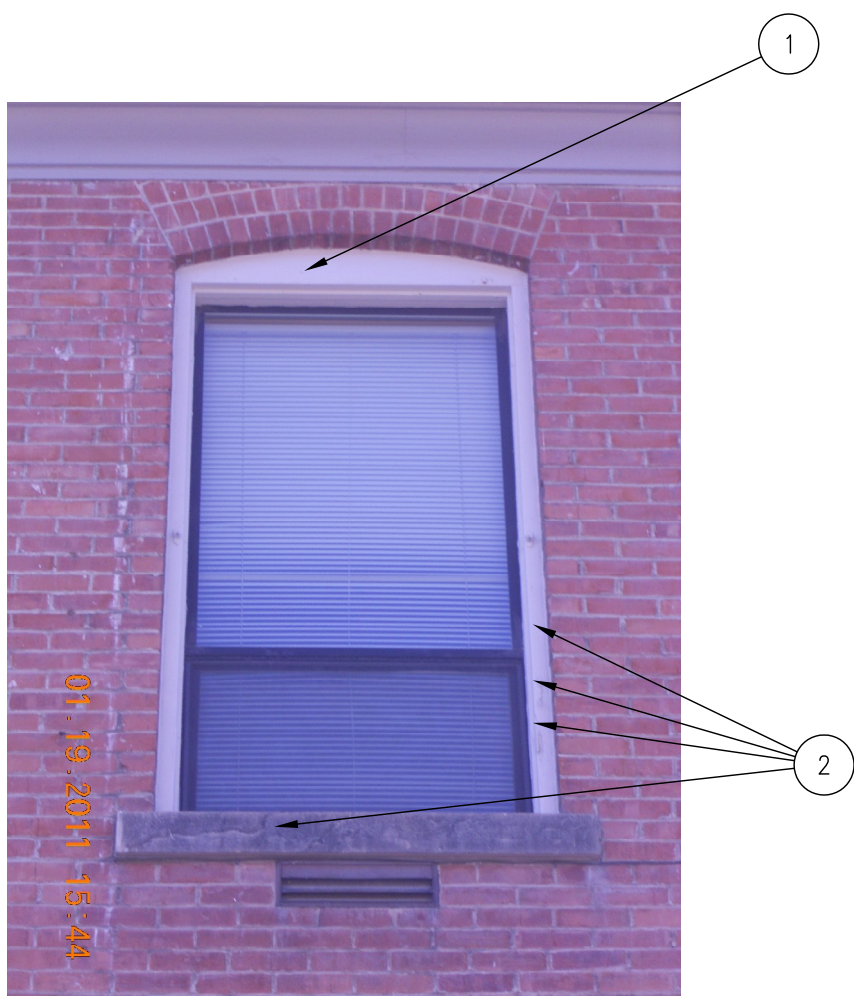

W206A

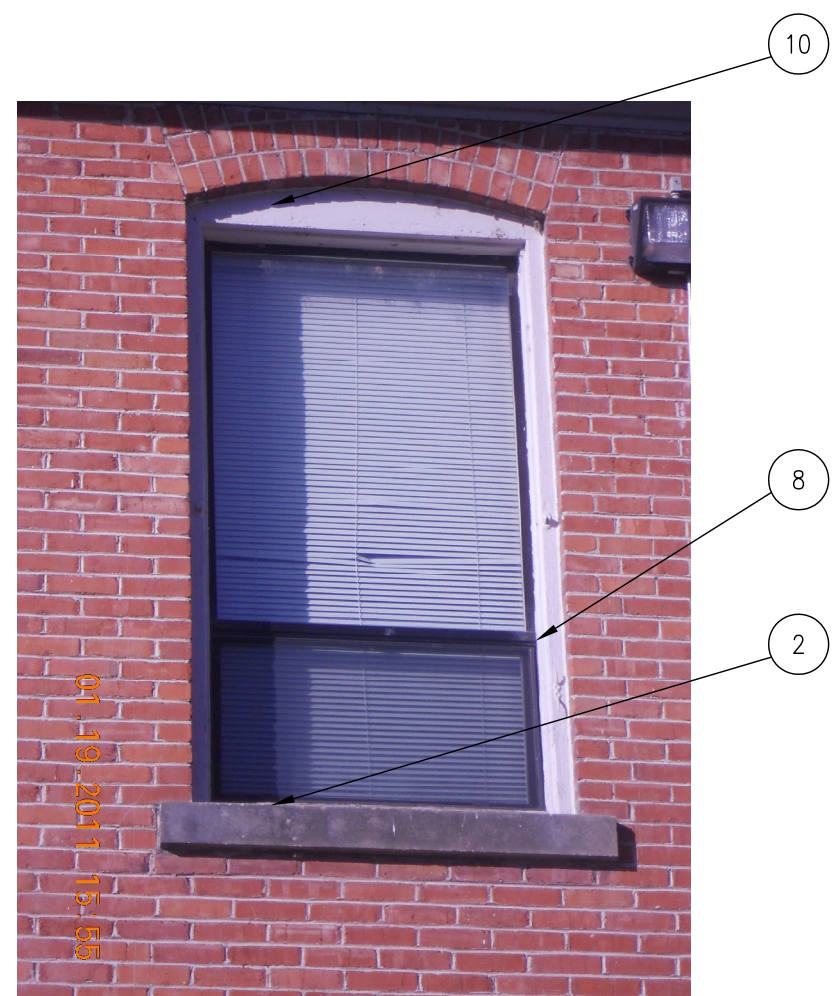

W214

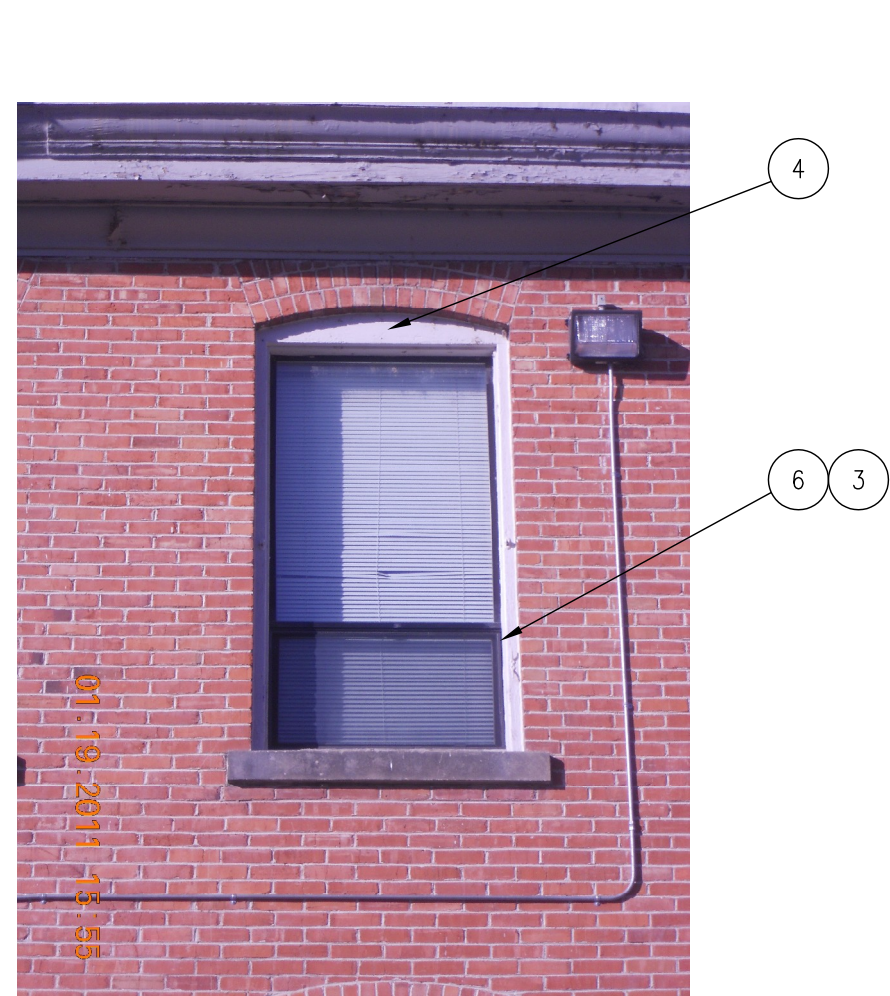

W214A



W214B



W215



W216



W216A



W216B



W216C-1



W216C-2




W218




W220



W301

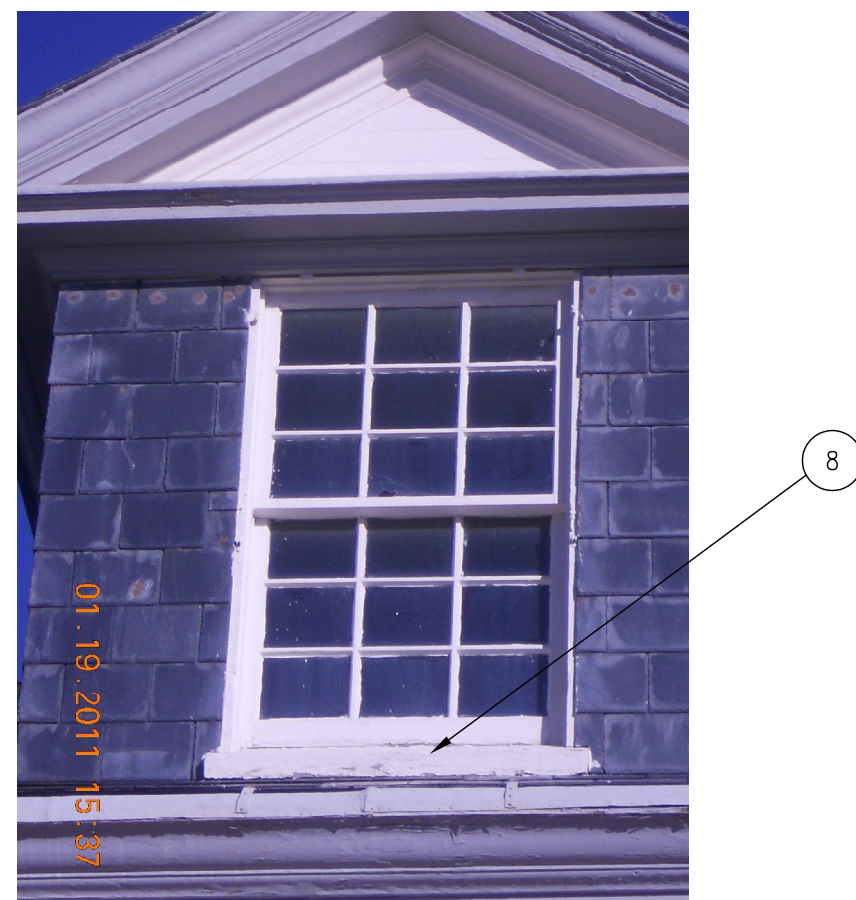

W301A

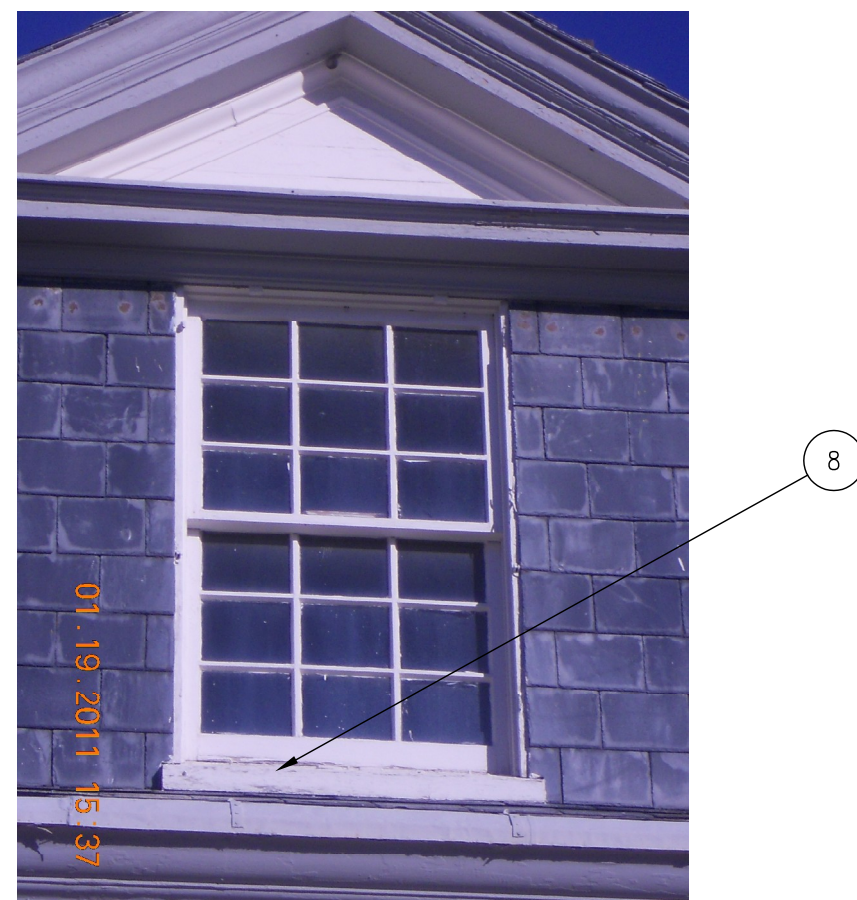

W301B



W305



W306



W307-1



W307-2



W307-3



WST32

GENERAL NOTES:

- COORDINATE EXTERIOR LIGHTING, ELECTRICAL EQUIPMENT, SECURITY AND FIRE ALARM EQUIPMENT WITH ELECTRICAL DRAWINGS.
- REMOVE ALL PAINT FROM WOOD CASINGS, JAMB, AND SILL AND IN ORDER TO REHABILITATE ALL EXTERIOR WOOD WINDOW FRAMES.
- WOOD ELEMENTS TO REMAIN SHALL BE PATCHED, REPAIRED, SANDED SMOOTH, AND THEN PRIMED AND PAINTED. CW/ COLOR SCHEDULE, AND RESTORATION DRAWINGS.
- REPLACE ALL (E) WINDOWS WITH (N) ALUMINUM CLAD WOOD WINDOW U.O.N. CW/ WINDOW SCHEDULE A6.1.
- PROVIDE SEALANT AROUND ALL EDGES, REMOVE OLD SEALANT AND REPLACE WITH NEW WHERE REQUIRED.
- DEMOLITION NOT SHOWN ON RESTORATION DRAWINGS REFER TO DEMOLITION PLANS FOR SCOPE OF DEMOLITION WORK.
- REFER TO RESTORATION DRAWINGS (A3.2-A3.9) FOR RESTORATION OF HISTORICAL WOOD, SLATE, BRICK, AND STONE.
- THE DRAWINGS INDICATE LOCATION, DIMENSIONS, REFERENCE, AND TYPICAL DETAILS OF CONSTRUCTION. THE DRAWINGS DO NOT INDICATE EVERY CONDITION - WORK NOT PARTICULARLY DETAILED SHALL BE OF CONSTRUCTION TO PARTS THAT ARE DETAILED. THESE DRAWINGS HAVE BEEN DEVELOPED FROM RECORDS FURNISHED BY THE OWNER AND FIELD SURVEYS. MATERIALS, DIMENSIONS, WALL THICKNESS, ROUGH OPENINGS, PATTERNS, AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
- PROTECT ALL EXISTING WORK TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, COMPONENTS, FINISHES, AND THE LIKE, DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE.
- VERIFY DIMENSIONS OF EXISTING OPENINGS PRIOR TO FABRICATING AND INSTALLING NEW FRAME AND DOOR. PROVIDE NEW BLOCKING AS REQUIRED.
- WHERE RUST FROM NAILS, METAL, OTHER SYSTEM OCCURS REMOVE RUST AND PREPARE WINDOW AS NEEDED FOR NEW FINISHING.
- IF PORTION OF WINDOW IS MISSING WOOD PROVIDE WOOD DUTCHMAN AT LOCATION AND SAND/PATCH SMOOTH TO PROVIDE CONTINUOUS FINISH.
- REMOVE NAILS, HANGERS, AND OTHER OBJECTS FROM FRAME AND SAND/PATCH SMOOTH TO PROVIDE CONTINUOUS FINISH.
- IF EXISTING DUTCHMAN IS INTACT AFTER PAINT IS REMOVE SMOOTH AS REQUIRED TO PROVIDE CONTINUOUS FINISH. IF DUTCHMAN IS PARTIAL OR DAMAGED REMOVE EXISTING DUTCHMAN AND REPLACE WITH NEW.

SHEET NOTES:

- REMOVE EXISTING NAIL(S)/HANGER FROM WINDOW AND PROVIDE SMOOTH SURFACE .
- REMOVED RUSTED NAIL AND REPLACE WITH NEW FASTENER AS REQUIRED. PREP FOR NEW FINISH.
- JOINT BETWEEN TRIM IS CRACKING AND STRETCHED CREATING A GAP BETWEEN TRIM PIECES, PROVIDE SEAL, PATCH, OR DUTCHMAN AS NEEDED.
- WOOD IS CHIPPED AND SPALLED SAND DOWN TO PROVIDE SMOOTH EDGE.
- REMOVE EXISTING SEALANT AND REPLACE WITH NEW.
- JAMB CRACKING AND PULLING APART, REPATCH AS REQUIRED.
- CRACK AT EXISTING DUTCHMAN, REMOVE AND REPLACE WITH NEW DUTCHMAN.
- WOOD CHIPPED, ROUGH, OR UNEVEN, PATCH, SAND DOWN, AND SMOOTH AS REQUIRED TO PROVIDE EVEN CONTINUOUS SURFACE.
- SAND DOWN AND FILL WOOD KNOTS IN JAMB.
- FILL AND PATCH CRACK AS NEEDED.
- WOOD SILL IS ROTTING, PATCH AND REPAIR SILL AS NEEDED.

LEGEND:

95% SUBMISSION

REVISIONS

DATE

CSHQ

C.W. MOORE PLAZA
250 S. 5TH ST. • BOISE, ID 83702
(208) 343-4635 • FAX (208) 343-1858
<http://www.cshqa.com>

JOHN D. MAULIN, ARCHITECT

C.W. MOORE PLAZA
250 S. 5TH ST.
BOISE, IDAHO
PHONE: 208-343-4635 FAX: 208-343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT / ENGINEER. WHETHER THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT, THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY ON OTHER PROJECTS FOR ANY PURPOSES WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY
NOT FOR
CONSTRUCTION

DRAWING TITLE

RESTORATION DRAWINGS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC
RENOVATE
BUILDING 33

BUILDING NUMBER

33

CHECKED

JMO

DRAWN

BKS

LOCATION

BOISE, IDAHO

DATE

03/04/11

PROJECT NO.

531-10-114

DRAWING NO.

A3.9

DWG. 30 OF 102

