
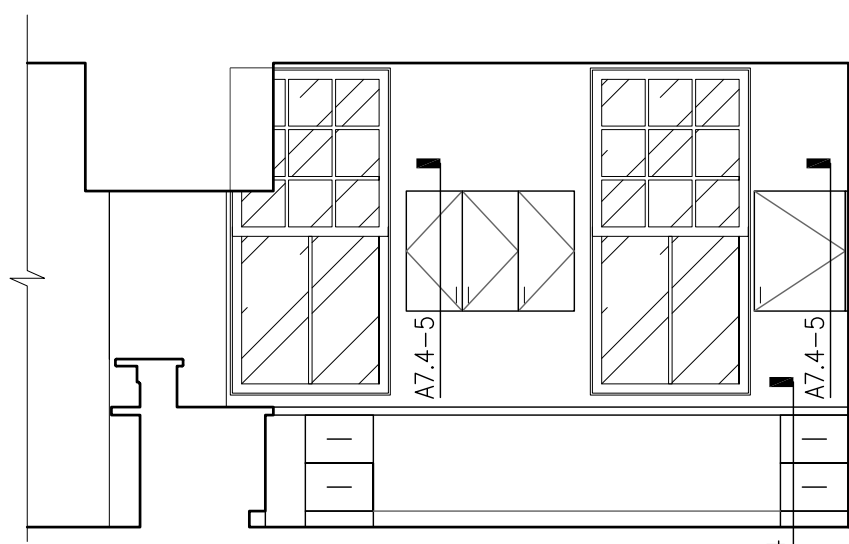
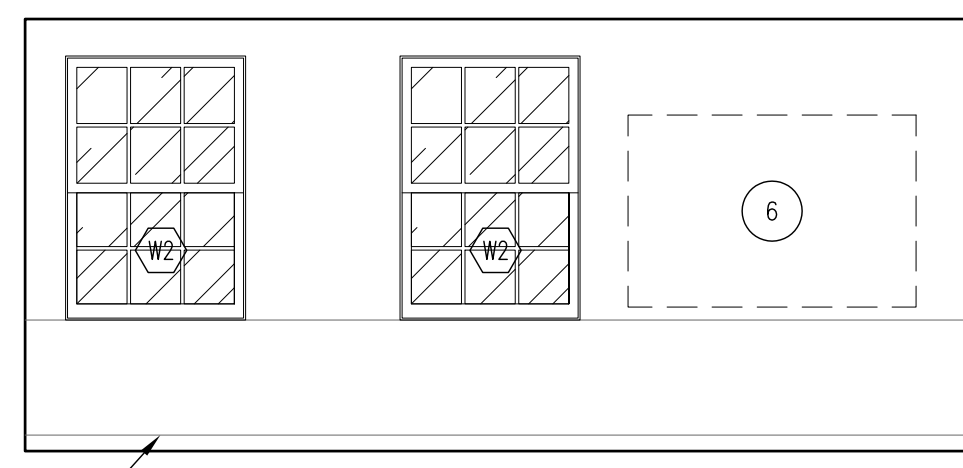
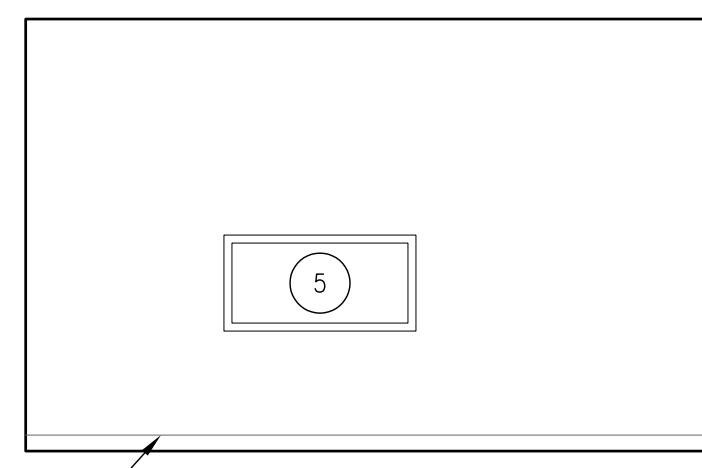
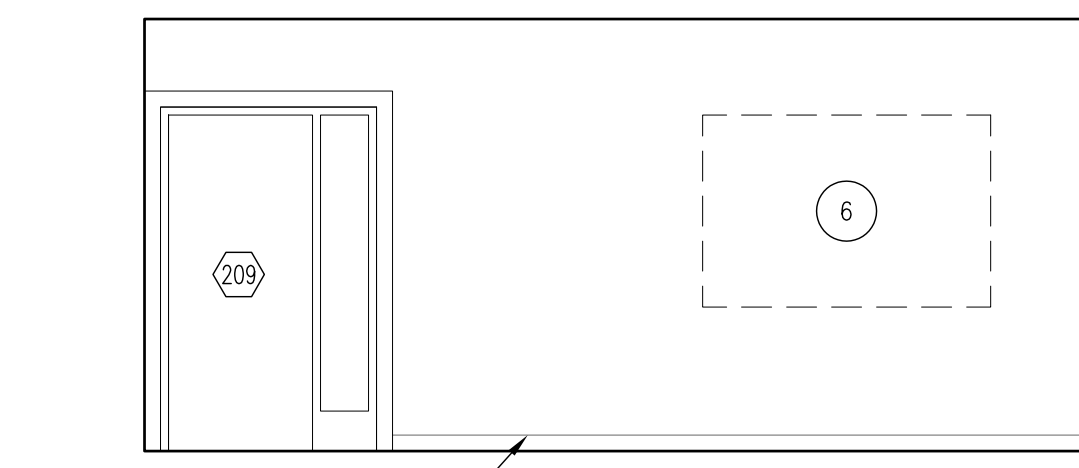
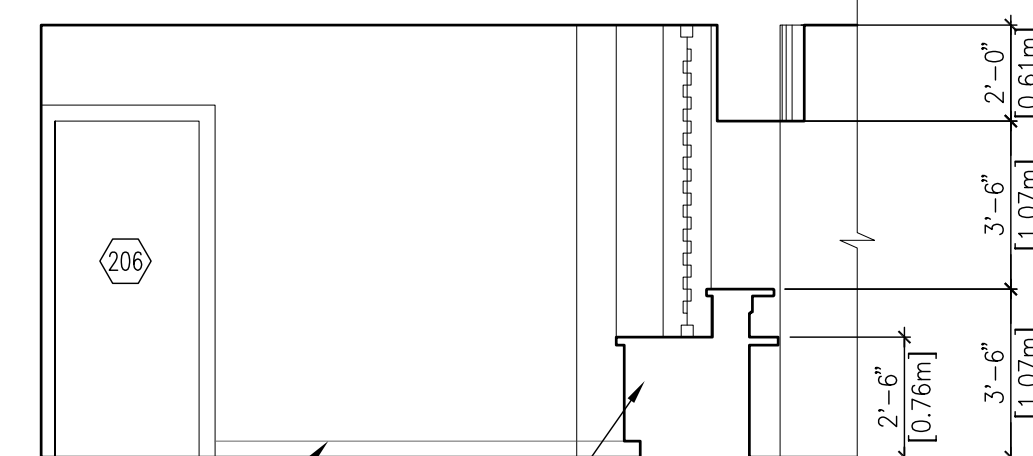
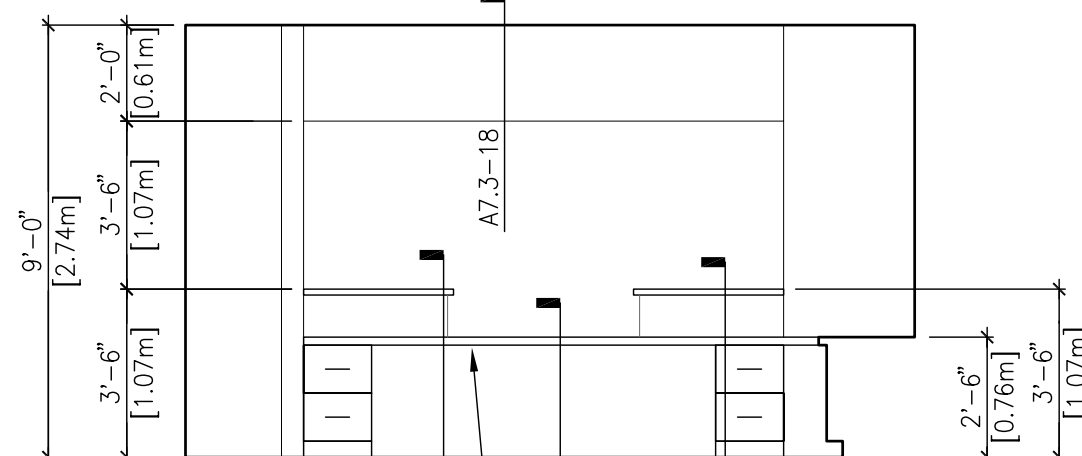
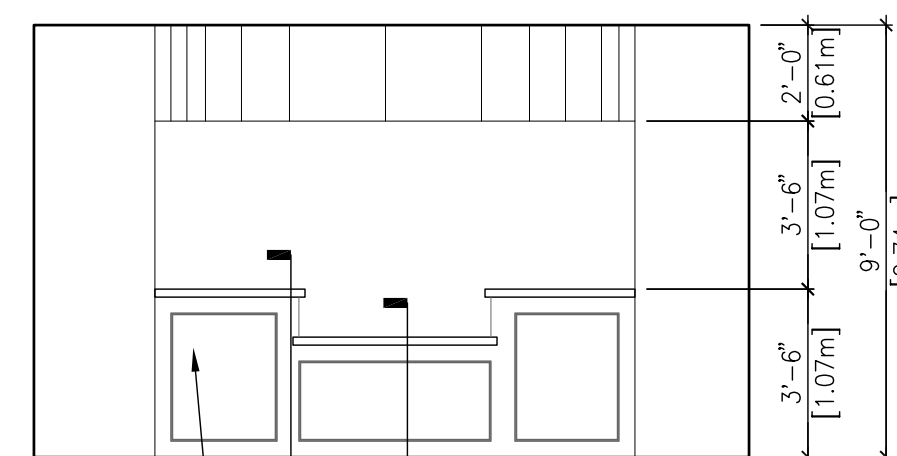
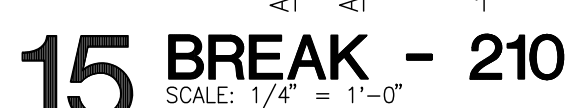
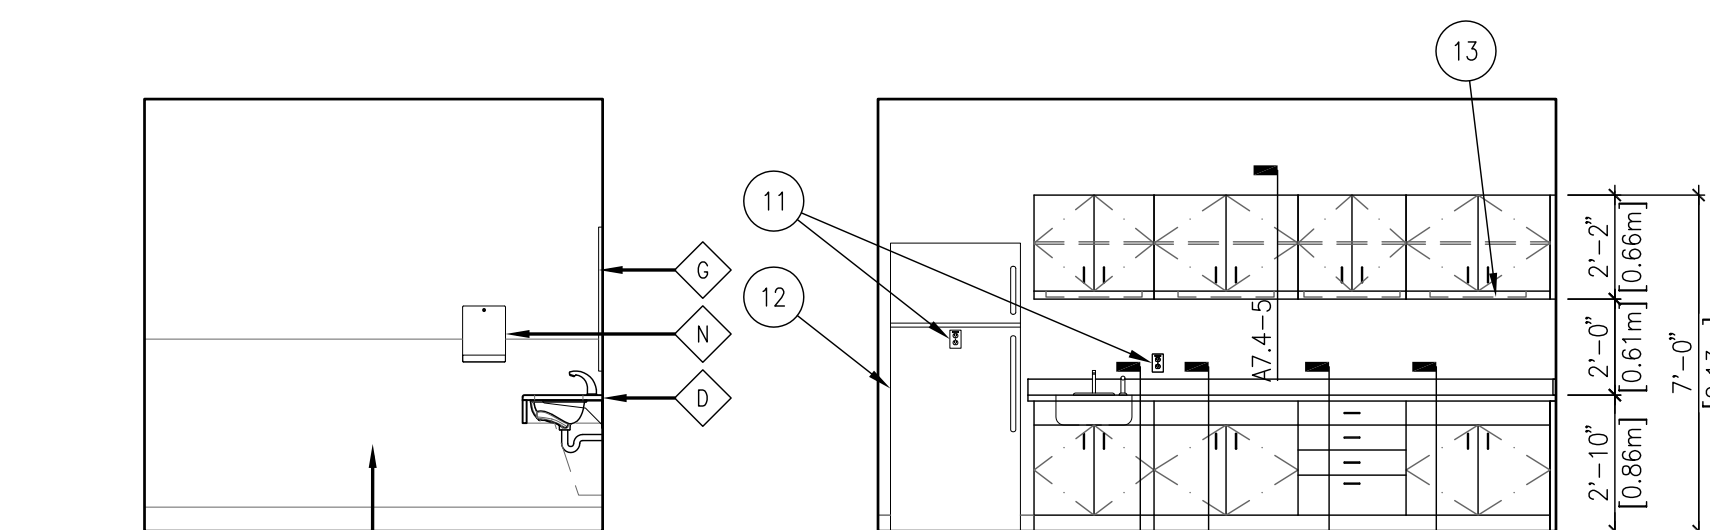
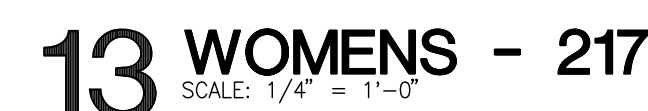
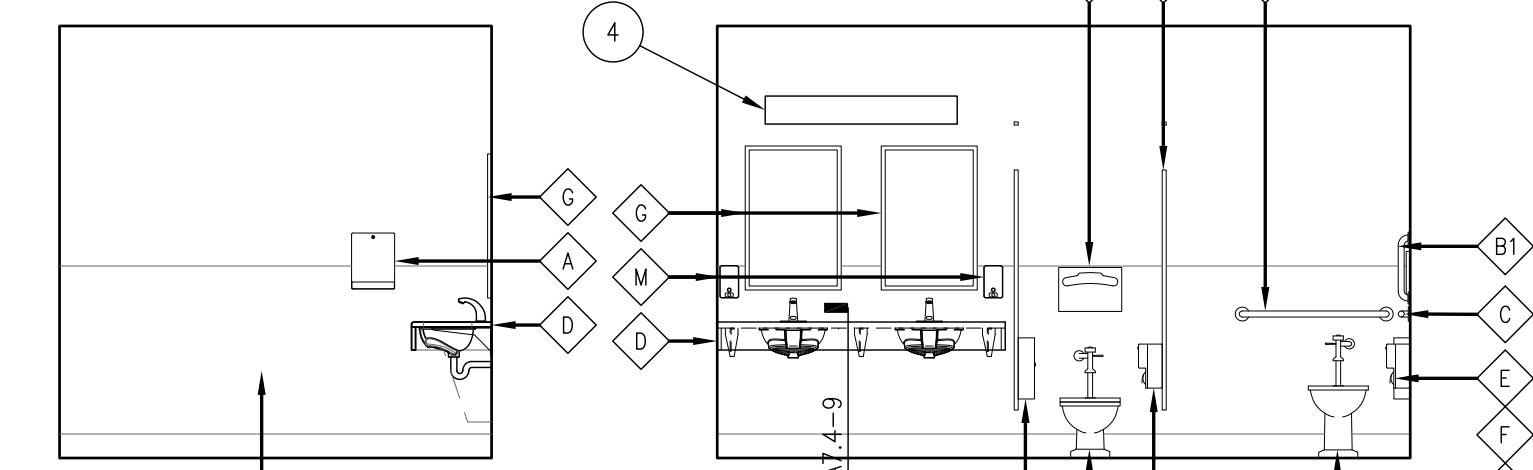
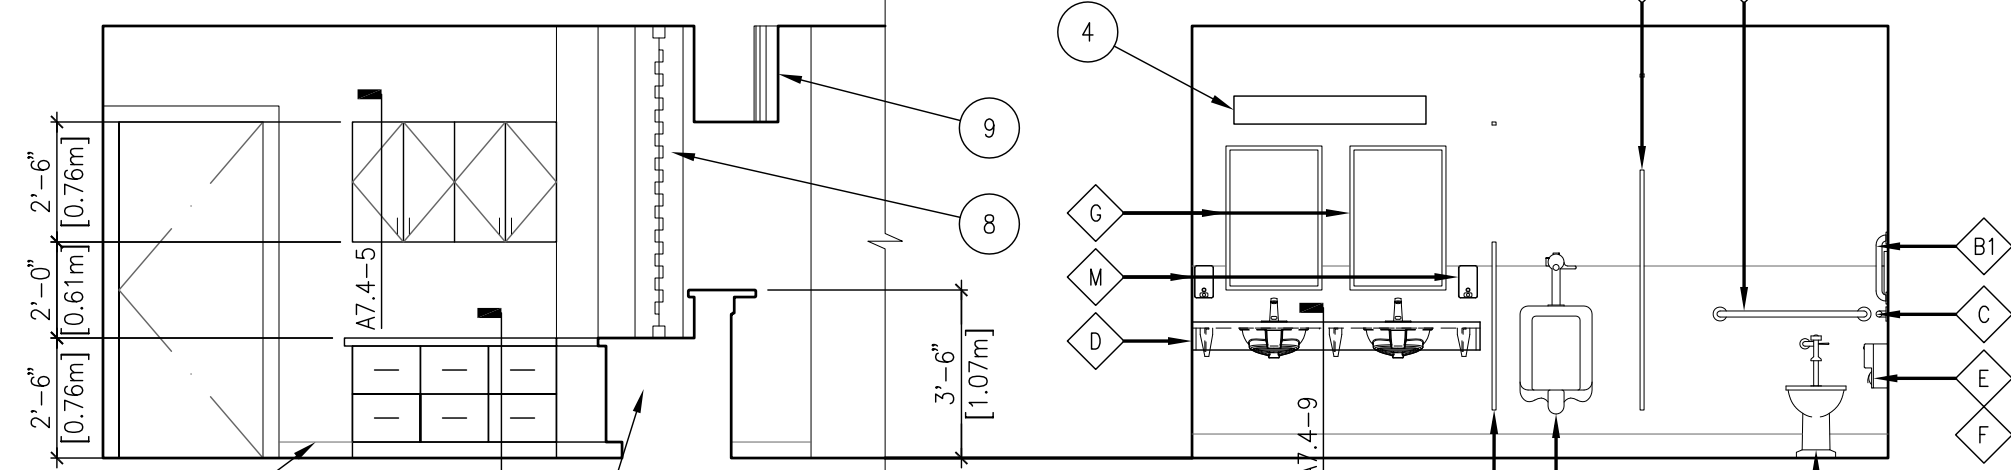
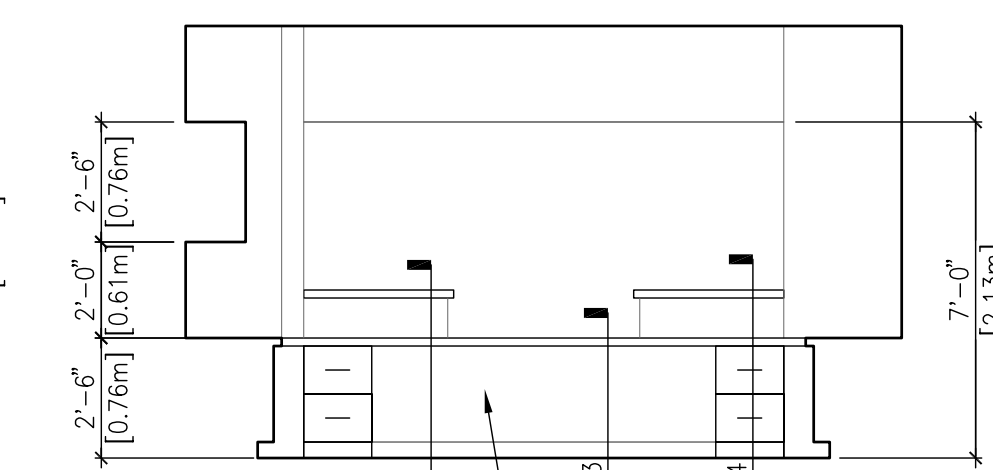
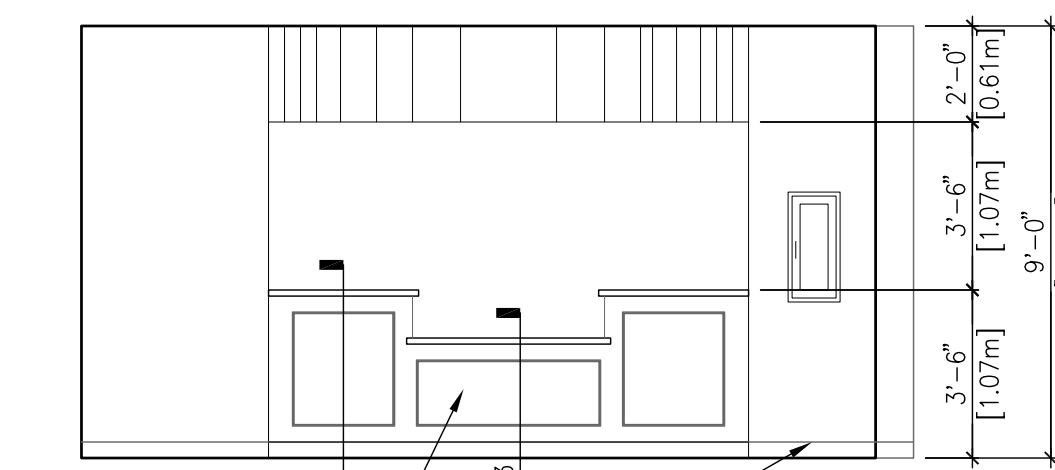
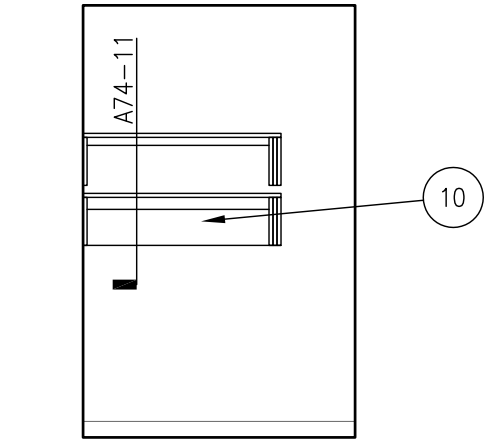
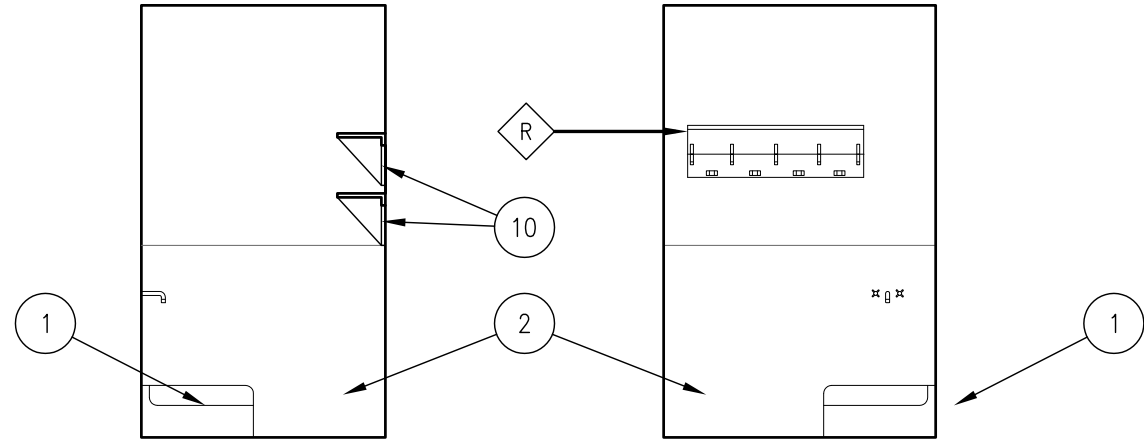
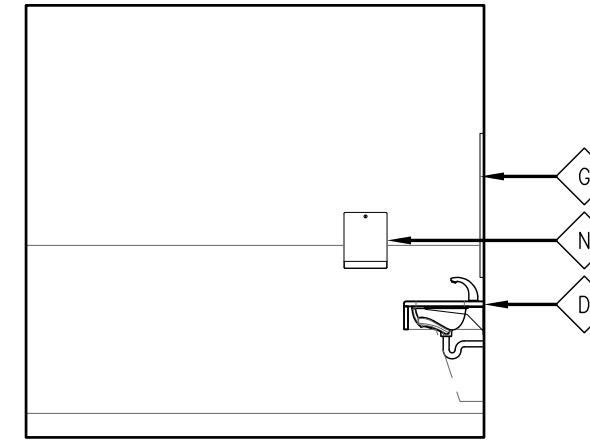
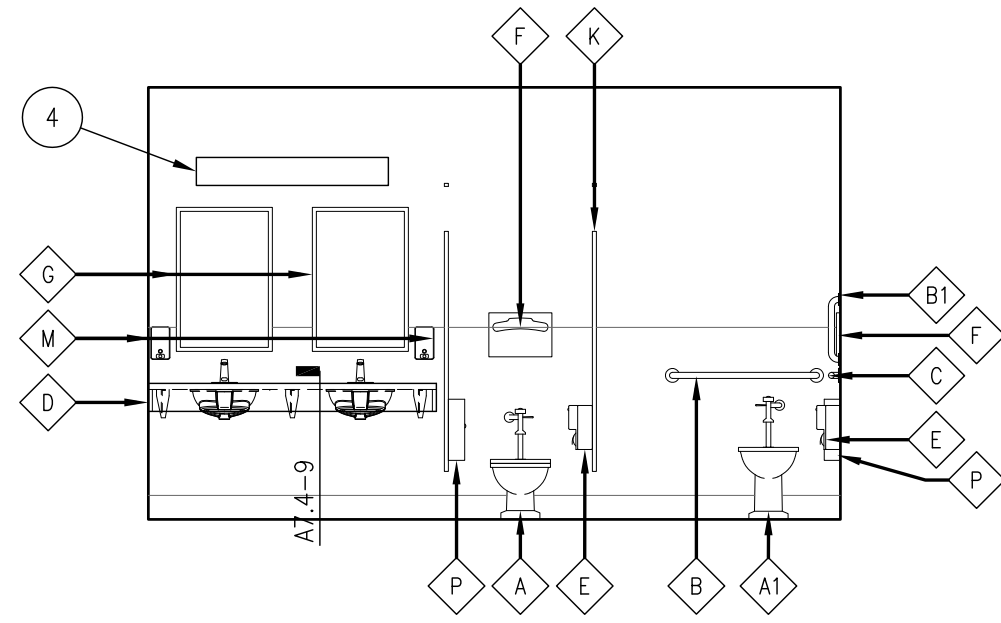
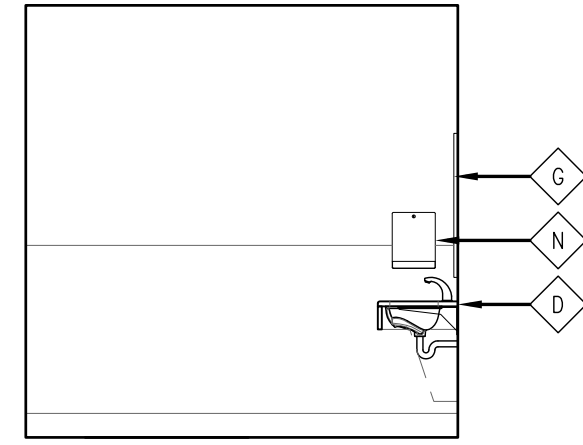
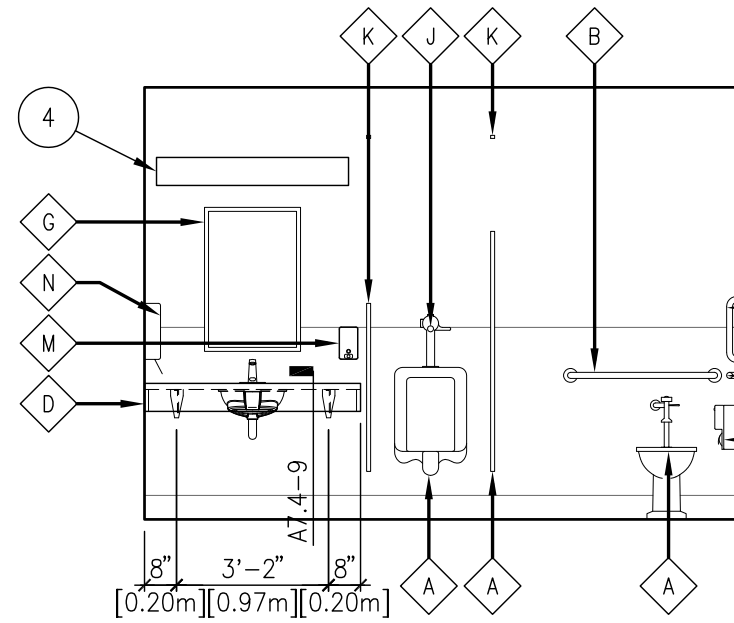


GENERAL NOTES:

- A. THE DRAWINGS INDICATE LOCATION, DIMENSIONS, REFERENCE, AND TYPICAL DETAILS OF CONSTRUCTION. THE DRAWINGS DO NOT INDICATE EVERY CONDITION - WORK NOT PARTICULARLY DETAILED SHALL BE OF CONSTRUCTION TO PARTS THAT ARE DETAILED. THESE DRAWINGS HAVE BEEN DEVELOPED FROM FIELD SURVEY RECORDS FURNISHED BY THE OWNER. MATERIALS, DIMENSIONS, WALL THICKNESS, ROUGH OPENINGS, PATTERNS, AND THE LIKE ARE INTERPRETATIONS OF THOSE RECORDS AND SHALL BE FIELD VERIFIED BY THE CONTRACTOR. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING WITH THE WORK.
- B. PROTECT ALL EXISTING WORK TO REMAIN FROM DAMAGE DURING CONSTRUCTION. ANY MATERIALS, SYSTEMS, COMPONENTS, FINISHES, AND THE LIKE, DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO OWNER'S ACCEPTANCE AT CONTRACTOR'S EXPENSE. REFER TO CMAR MATERIALS HANDLING AND PROTECTION SYSTEMS.
- C. REMOVE AND DISCARD ALL EXISTING ELECTRICAL, TEL/DATA, AND FIRE PROTECTION DEVICES, INCLUDING BUT NOT LIMITED TO SWITCHES, FIRE ALARMS, CONDUIT, OUTLETS, ETC. CW/ELECTRICAL, COMMUNICATIONS, AND FIRE PROTECTION FOR DEVICES TO BE REMOVED.
- D. NEW ELECTRICAL AND COMMUNICATION OUTLETS, SWITCHES AND RECEPTACLES ARE TYPICALLY NOT SHOWN ON INTERIOR ELEVATIONS. CW/ ELECTRICAL AND COMMUNICATIONS DRAWINGS FOR LOCATIONS OF ALL THESE ITEMS. ADDITIONAL TRENCHING AND PATCHING OF EXISTING WALLS MAY HAVE TO OCCUR FOR INSTALLATION OF THESE ITEMS.
- E. REMOVE ALL UNUSED SIGNS, NAILS, AND SCREWS FROM PLASTER WALLS.
- F. RE: A1.3 AND A1.4 FOR DIMENSION PLANS.
- G. RE: A10.1 AND A10.2 FOR FURNITURE AND EQUIPMENT PLANS.
- H. RE: A6.2 FOR DOOR, WINDOW AND FRAME SCHEDULES.
- I. RE: A6.1 FOR FINISH SCHEDULE.
- J. CONTRACTOR SHALL PROVIDE BLOCKING OR BACKING FOR ALL WALL MOUNTED ACCESSORIES AND EQUIPMENT.
- K. PROVIDE MOISTURE RESISTANT GYPSUM WALLBOARD AT ALL AREAS EXPOSED TO MOISTURE.
- L. PROVIDE "J" TRIM AT ALL GYPSUM BOARD TRANSITIONS TO DISSIMILAR MATERIALS.
- M. RE: A7.1, A7.2, A7.3, A7.4, A7.5, A7.6 AND A7.7 FOR EXTERIOR AND INTERIOR DETAILS APPLICABLE BUT NOT REFERENCED.
- N. RE: A9.1 AND A9.2 FOR ALL CEILING INFORMATION.
- O. THE HINGE SIDE OF DOOR FRAMES IN NEW OPENINGS SHALL BE MOUNTED 4" FROM ADJACENT PERPENDICULAR WALL UNLESS NOTED OTHERWISE.
- P. PROVIDE INSULATED COVERS AT ALL EXPOSED PIPING UNDER LAVATORIES.
- Q. FIELD VERIFY ALL DIMENSIONS PRIOR TO FABRICATION OF CASEWORK.
- R. MIRRORS ARE TO BE CENTERED OVER THE SINKS.
- S. VERIFY ALL MILLWORK LOOKING REQUIREMENTS PRIOR TO INSTALLATION.
- T. ALL CASEWORK SHALL BE PRE-MANUFACTURED METAL CASEWORK UNLESS OTHERWISE INDICATED. PROVIDE FISHER HAMILTON INSERT STEEL OR EQUAL UNLESS OTHERWISE NOTED. COUNTERTOPS SHALL BE EPOXY RESIN UNLESS OTHERWISE NOTED.
- U. EXPOSED SURFACES OF CUSTOM CASEWORK ARE TO BE FINISHED WITH DECORATIVE PLASTIC LAMINATE. AN EXPOSED SURFACE IS ANYTHING THAT CAN BE SEEN WITH THE DOORS AND DRAWERS CLOSED. THIS INCLUDES THE UNDER SIDE AND TOP OF WALL MOUNTED CABINETS (INCLUDING SCRIBES AND FILLER PANELS), ALL SURFACES OF COUNTER SUPPORTS, AND ALL OPEN CABINET SHELVES AND SURFACES. IN ADDITION, ALL SIX SURFACES OF ALL CABINET DOORS AND ALL SIX SURFACES OF OPEN ADJUSTABLE SHELVES ARE TO BE FINISHED IN DECORATIVE PLASTIC LAMINATE. THE FRONT AND FOUR EDGES OF ALL DRAWER FRONTS ARE TO RECEIVE DECORATIVE PLASTIC LAMINATE. THE SEMI-EXPOSED INTERIOR SURFACES OF DRAWERS AND CABINETS (THOSE SURFACES THAT CAN ONLY BE SEEN WHEN THE DOOR OR DRAWER IS OPEN) ARE TO BE MELAMINE WITH VINYL EDGES, EXCEPT AS NOTED OTHERWISE ABOVE. THE FOUR EDGES OF ALL MELAMINE ADJUSTABLE SHELVES WITHIN CLOSED CABINETS ARE TO BE FINISHED WITH VINYL EDGING. THE UNDERSIDE OF ALL COUNTER TOPS ARE TO RECEIVE LAMINATE BACKING SHEET.
- V. ALL FILE DRAWERS MUST HAVE A MINIMUM CLEAR INSIDE HEIGHT OF 10" AND A MINIMUM CLEAR INSIDE WIDTH OF 13".

SHEET NOTES:

- MOP SINK AND FAUCET. CW/ PLUMBING DRAWINGS.
- FRP TO 4'-0" A.F.F.
- WALL BASE, RE: FINISH SCHEDULED.
- LIGHT FIXTURE, MOUNTED ON WALL ABOVE MIRROR(S), CENTER ON MIRROR(S). CENTER MIRROR(S). CW/ ELECTRICAL.
- VIDEO/TELECOMMUNICATION MONITOR, OWNER PROVIDED, CONTRACTOR INSTALLED. CW/ ELECTRICAL AND DATA.
- WHITE/TACK BOARD, OWNER SUPPLIED AND INSTALLED.
- OFFICE ADMINISTRATOR DESK. CW/7.X-X FOR DETAILED PLAN.
- HORIZONTAL SLIDING GRILLE. RE:A7.X-X.X.
- SOFFIT ABOVE TRANSACTION COUNTER, ALIGN FACE OF SOFFIT WITH FACE OF TRANSACTION COUNTER.
- OPEN SHELVING WITH PLASTIC LAMINATE FINISH.
- RECEPTACLE, CW/ ELECTRICAL.
- REFRIGERATOR, RE: A10.1 AND A 10.2.
- UNDER CABINET LIGHTS, CW/ ELECTRICAL.

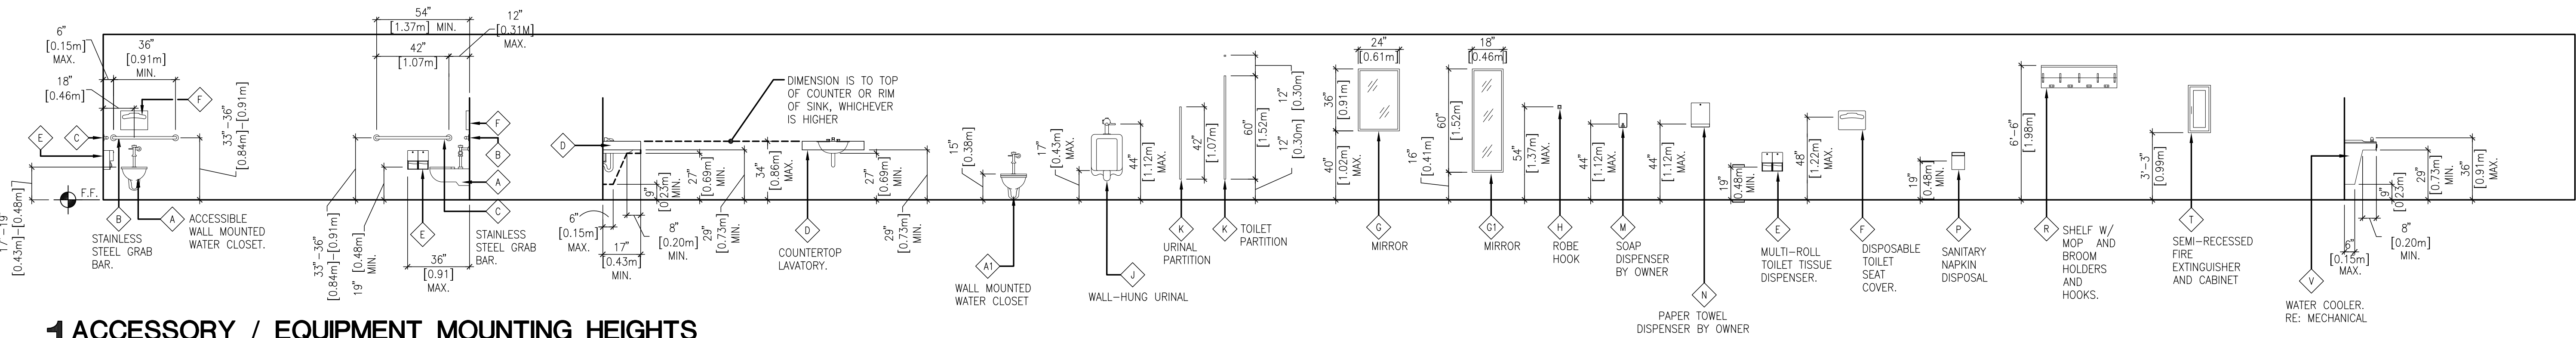

95% SUBMISSION

REVISIONS DATE

CSHQ6A

C.W. MOORE PLAZA
250 S. 5TH ST. • BOISE, ID 83702
(208) 343-4635 • FAX (208) 343-1858
http://www.cshqa.com

JOHN D. MAULIN, ARCHITECT
C.W. MOORE PLAZA
250 S. 5TH ST.
BOISE, IDAHO
PHONE: (208) 343-4635 FAX: (208) 343-1858

THESE DRAWINGS AND SPECIFICATIONS, AS INSTRUMENTS OF SERVICE, ARE AND SHALL REMAIN THE PROPERTY OF THE ARCHITECT / ENGINEER. IF THE PROJECT FOR WHICH THEY ARE MADE IS EXECUTED OR NOT, THESE DRAWINGS AND SPECIFICATIONS SHALL NOT BE USED BY ANY PERSON OR ENTITY ON OTHER PROJECTS FOR ANY ADDITION TO THE PROJECT OR COMPLETION OF THE PROJECT WHEN PHASED WITHOUT THE WRITTEN CONSENT OF CSHQA OR ITS AFFILIATES. Copyright © 2011

STAMP

PRELIMINARY
NOT FOR
CONSTRUCTION

DRAWING TITLE

INTERIOR ELEVATIONS

APPROVED: DIVISION CHIEF

APPROVED: SERVICE DIRECTOR

PROJECT TITLE

VAMC
RENOVATE
BUILDING 33

BUILDING NUMBER

33

CHECKED

JMO

DRAWN

BKS

LOCATION

BOISE, IDAHO

DATE

03/04/11

PROJECT NO.

531-10-114

DRAWING NO.

A8.1

DWG. 42 of 102

DEPARTMENT OF VETERANS AFFAIRS